

TVT

Secure The World With You



TD-9525S1H

2 MP Network IR Water-proof
Dome Camera


www.sigmasec.gr

TVT

TVT DIGITAL TECHNOLOGY CO., LTD.

Sigma


2 MP Network IR Water-proof Dome Camera

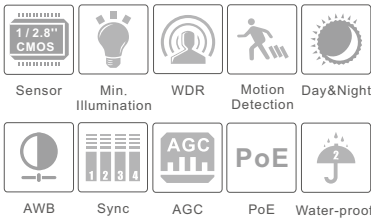

Features

- 2MP (1920 x 1080) coding
- Max. resolution: 1920 x 1080
- ICR auto switch, true day / night
- 20 ~ 30m IR night view distance
- Third generation of dot matrix LED IR lights, small size, efficient heat dissipation, long lifespan
- 3D DNR, digital WDR
- ROI coding
- PoE power supply
- Support smart phone, iPad, remote monitoring
- IP66 ingress protection
- Support three streams

Dimensions

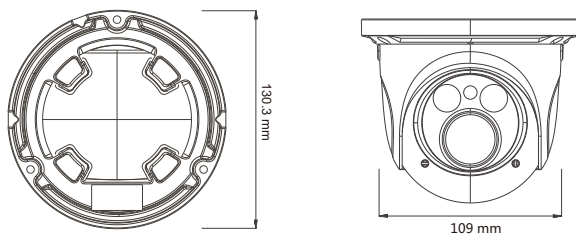

Available Accessories



TD-YXH0201

TD-YZJ0802

TD-YZJ0402

Specifications

Specifications	Model	TD-9525S1H
Camera		
Image Sensor		1 / 2.8 "CMOS
Image Size		1920 x 1080
Electronic Shutter		1 / 25 s ~ 1 / 100000 s
Iris Type		Fixed Iris
Min. Illumination		Color : 0.002 lux @F1.2,AGC ON; B / W : 0.0002 lux @F1.2,AGC ON
Lens		2.8~12 mm @ F1.4-2.8, horizontal field of view :95.7° ~ 35.9°
Lens Mount		Φ14
Day & Night		ICR
Wide Dynamic Range		Digital WDR
Digital NR		3D DNR
Angle Adjustment		Pan : 0°~360°, Tilt : 0°~90°, Rotation : 0°~360°
Image		
Video Compression		H.264 / MJPEG
H.264 Compression Standard		Baseline Profile / Main Profile / High Profile
Resolution		1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 x 240
Main Stream		60Hz : 1080P (1 ~ 30fps) / 720P (1 ~ 30fps) 50Hz : 1080P (1 ~ 25fps) / 720P (1 ~ 25fps)
Bit Rate		128Kbps ~ 6Mbps
Bit Rate Type		VBR / CBR
Quality		Five levels under VBR; Freely adjustable under CBR
Image Settings		ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
ROI		Each ROI to be configured separately
Interfaces		
Network		RJ45
Functions		
Remote Monitoring		IE browsing, CMS remote control
Online Connection		Support simultaneous monitoring for up to 3 users; Support multi-stream real time transmission
Network Protocol		TCP / IP, UDP, DHCP, NTP, RTSP, DDNS, SMTP, FTP
Interface Protocol		ONVIF
Storage		Network remote storage
Smart Alarm		Motion alarm
PoE		Yes
IR Distance		20 ~ 30 m
Ingress Protection		IP66
Others		
Power Supply		DC12V / PoE
Power Consumption		< 3W
IR Consumption ON		< 5W
Operating Environment		- 20 °C ~ 50 °C, 10 % ~ 90 % relative humidity
Dimensions (mm)		Φ109 x 130
Weight (net)		687g
Installation		Pendent mounting (Wall mounting available with the junction box and bracket)

Available Model

Available Model	TD-9525S1H (D / FZ / PE / AR2)
-----------------	----------------------------------

